

# B1M032120HK

**1200V ▲ 32mΩ ▲ 84A ▲ SiC MOSFET**
**SILICON CARBIDE SiC MOSFET ▲ THT type**

N-channel enhancement mode

Low on-resistance and capacitance

TO-247-4L package with Kelvin Source connection

Avalanche ruggedness

**Elimination of voltage drops over the source inductance**

## SPECIFICATION

Item (T <sub>c</sub> = 25°C, unless otherwise noted)		Characteristics
Operating Temperature Range	T <sub>J</sub>	-55°C to +150°C
Storage Temperature Range	T <sub>S</sub>	-55°C to +150°C
Drain-Source Voltage	V <sub>DS MAX</sub>	1200V
Continuous Drain Current	I <sub>D</sub>	84A
Drain-Source On-State Resistance <sup>Note 1</sup>	R <sub>DS(ON)TYP</sub>	32mΩ
Reverse Transfer Capacitance <sup>Note 2</sup>	C <sub>RSS</sub>	33pF
Power Dissipation	P <sub>D</sub>	335W

### Notes

**1: V<sub>GS</sub> = 20V, I<sub>D</sub> = 50A**
**2: V<sub>DS</sub> = 800V, V<sub>GS</sub> = 0V, f = 1MHz, V<sub>AC</sub> = 25mV**

## APPLICATIONS

EV Charging	Industrial Inverters	Motors & Drives	Power Factor Correction	Renewable Energy	SMPS	UPS

## PIN DESCRIPTION

Circuit Diagram	Outline - Front View	Pin No.	Symbol	Description
		1 2 3 4	D S KS G	Drain Source Kelvin Source Gate

**ABSOLUT MAXIMUM RATINGS ▲  $T_C = 25^\circ\text{C}$ , unless otherwise noted**

Item	Condition	Symbol		Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{V}, I_{DS} = 100\mu\text{A}$	$V_{DS\text{ MAX}}$	1200	V
Continuous Drain Current	$V_{GS} = 20\text{V}, T_C = 25^\circ\text{C}$	$I_D$	84	A
Continuous Drain Current	$V_{GS} = 20\text{V}, T_C = 100^\circ\text{C}$	$I_D$	53	A
Pulse Drain Current	Pulse with $t_p$ limited by $T_{J\text{ MAX}}$	$I_{D, \text{pulse}}$	200	A
Power Dissipation	$T_C = 25^\circ\text{C}$	$P_D$	335	W
Gate Source Voltage		$V_{GS, \text{MAX}}$	-10/+25	V
Recommended Gate Source Voltage		$V_{GS, \text{op}}$	-5/+20	V
Operating Junction Temperature		$T_J$	-55 to +150	$^\circ\text{C}$
Storage Temperature Range		$T_{\text{STG}}$	-55 to +150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS ▲  $T_J = 25^\circ\text{C}$ , unless otherwise noted**

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{V}, I_D = 100\mu\text{A}$	$V_{(\text{BR})\text{DSS}}$	1200			V
Gate-Source Threshold Voltage	$V_{GS} = V_{DS}, I_D = 5\text{mA}$	$V_{GS(\text{th})}$		2.9		V
Gate-Source Threshold Voltage	$V_{GS} = V_{DS}, I_{DS} = 5\text{mA}, T_J = 150^\circ\text{C}$	$V_{GS(\text{th})}$		2.1		V
Zero Gate Voltage Drain Current	$V_{DS} = 1200\text{V}, V_{GS} = 0\text{V}$	$I_{\text{DSS}}$		0.7	45	$\mu\text{A}$
Zero Gate Voltage Drain Current	$V_{DS} = 1200\text{V}, V_{GS} = 0\text{V}, T_J = 150^\circ\text{C}$	$I_{\text{DSS}}$		5	200	$\mu\text{A}$
Gate-Source Leakage Current	$V_{GS} = 20\text{V}, V_{DS} = 0\text{V}$	$I_{\text{GSS}}$			250	nA
Drain-Source On-State Resistance	$V_{GS} = 20\text{V}, I_D = 50\text{A}$	$R_{\text{DS(ON)}}$		32		m $\Omega$
Drain-Source On-State Resistance	$V_{GS} = 20\text{V}, I_D = 50\text{A}, T_J = 150^\circ\text{C}$	$R_{\text{DS(ON)}}$		47		m $\Omega$

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
<b>Dynamic Characteristics</b>						
Input Capacitance	$V_{DS} = 800\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}, V_{\text{AC}} = 25\text{mV}$	$C_{\text{ISS}}$		4874		pF
Output Capacitance	$V_{DS} = 800\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}, V_{\text{AC}} = 25\text{mV}$	$C_{\text{OSS}}$		220		pF
Reverse Transfer Capacitance	$V_{DS} = 800\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}, V_{\text{AC}} = 25\text{mV}$	$C_{\text{RSS}}$		33		pF
Internal Gate Resistance	$f = 1\text{MHz}, V_{\text{AC}} = 25\text{mV}$	$R_{\text{G(INT.)}}$		1.7		$\Omega$
Turn-On Delay Time	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$t_{\text{D(ON)}}$		30		ns
Rise Time	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$t_{\text{R}}$		66		ns
Turn-Off Delay Time	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$t_{\text{D(OFF)}}$		67		ns
Fall Time	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$t_{\text{F}}$		22		ns
Turn-on Switching Energy	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$E_{\text{ON}}$		1500		$\mu\text{J}$
Turn-off Switching Energy	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_{DS} = 50\text{A}, R_{\text{G(ext)}} = 2.2\Omega, \text{Inductive Load}$	$E_{\text{OFF}}$		780		$\mu\text{J}$

**BUILT-IN SiC DIODE CHARACTERISTICS ▲  $T_J = 25^\circ\text{C}$ , unless otherwise noted**

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
<b>Source-Drain Diode</b>						
Inverse Diode Forward Voltage	$V_{GS} = -5\text{V}, I_{SD} = 25\text{A}$	$V_{SD}$		4.6		V
Reverse Recovery Time	$V_{GS} = -5\text{V}, I_{SD} = 50\text{A}, V_{DS} = 800\text{V}, di/dt = 1500\text{A}/\mu\text{s}$	$t_{RR}$		27		ns
Reverse Recovery Charge	$V_{GS} = -5\text{V}, I_{SD} = 50\text{A}, V_{DS} = 800\text{V}, di/dt = 1500\text{A}/\mu\text{s}$	$Q_{RR}$		418		nC
Peak Reverse Recovery Current	$V_{GS} = -5\text{V}, I_{SD} = 50\text{A}, V_{DS} = 800\text{V}, di/dt = 1500\text{A}/\mu\text{s}$	$I_{RRM}$		19		A

**GATE CHARGE CHARACTERISTICS ▲  $T_J = 25^\circ\text{C}$ , unless otherwise noted**

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Gate to Source Charge	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_D = 50\text{A}$	$Q_{GS}$		104		nC
Gate to Drain Charge	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_D = 50\text{A}$	$Q_{GD}$		93		nC
Total Gate Charge	$V_{DS} = 800\text{V}, V_{GS} = -5/+20\text{V}, I_D = 50\text{A}$	$Q_G$		314		nC

**THERMAL RESISTANCE PERFORMANCE**

Item	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance, Junction to Case	$R_{\theta,JC}$		0.373		K/W

REFERENCE DATA ▲ TYPICAL DEVICE PERFORMANCE

Fig. 1 • Forward Output Characteristics  $I_{DS}$  vs.  $V_{DS}$ ,  $T_C = 25^\circ\text{C}$

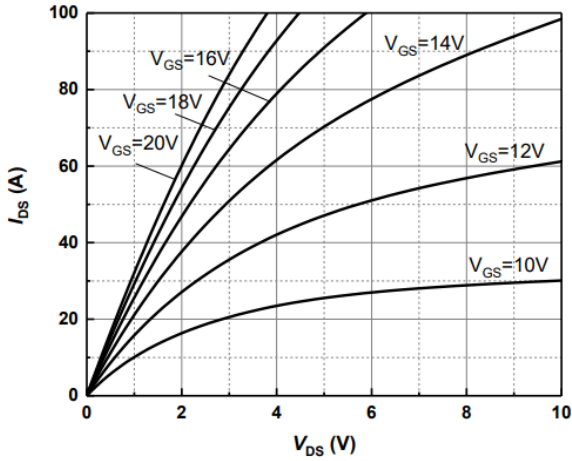


Fig. 2 • Forward Output Characteristics  $I_{DS}$  vs.  $V_{DS}$ ,  $T_C = 150^\circ\text{C}$

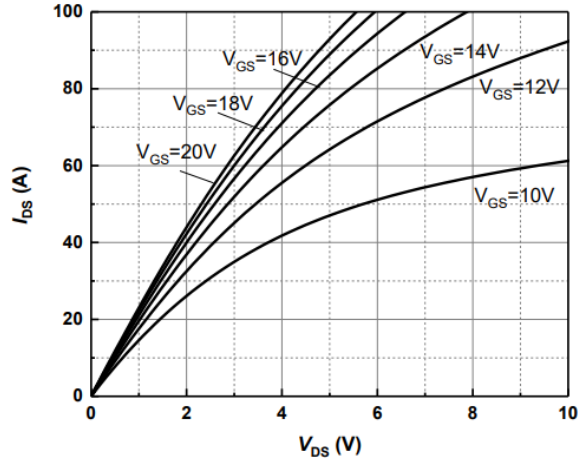


Fig. 3 • Transfer Characteristics at  $T_C = 25^\circ\text{C}$

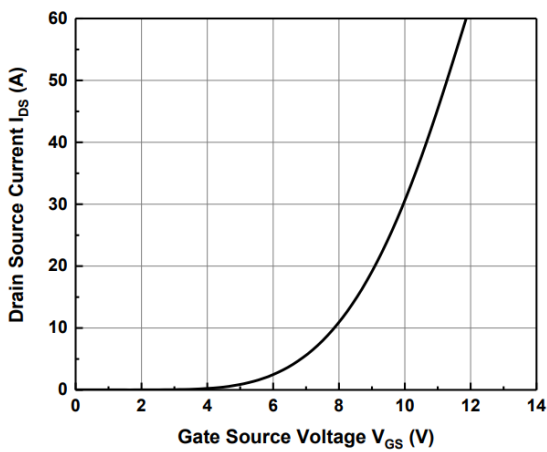


Fig. 4 • On-Resistance  $R_{ON}$  vs. Junction Temperature  $T_J$  at  $V_{GS} = 20\text{V}$ ,  $I_{DS} = 20\text{A}$

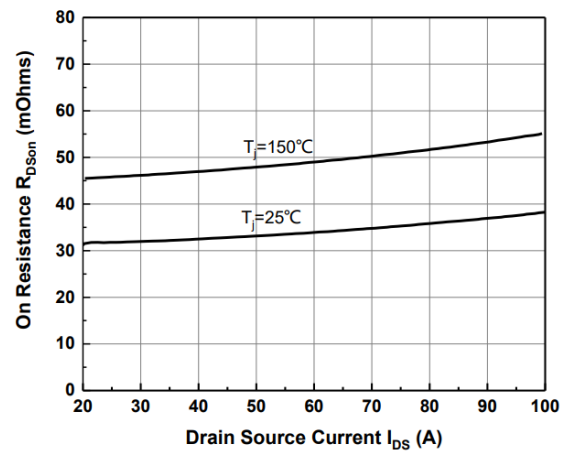


Fig. 6 • On-Resistance  $R_{ON}$  vs. Junction Temperature  $T_J$  for various Gate Voltage  $V_{GS}$


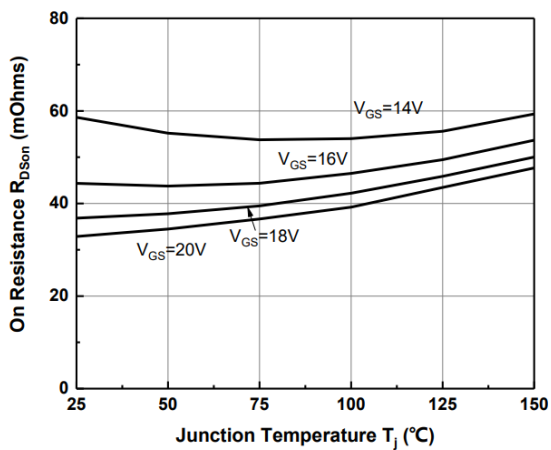


Fig. 6 • Capacitances vs. Drain to Source Voltage  $V_{DS}$  (0 to 1000V)

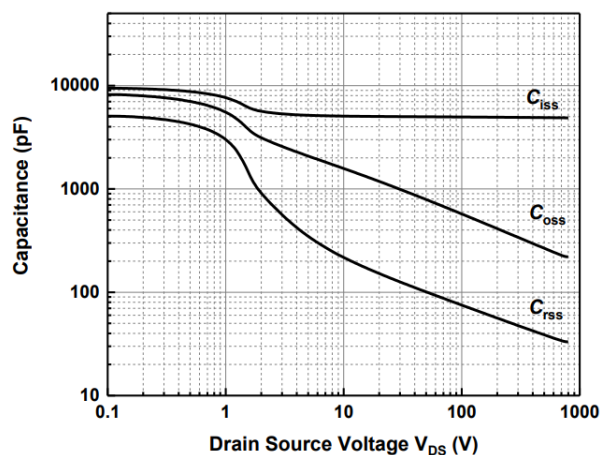

REFERENCE DATA ▲ TYPICAL DEVICE PERFORMANCE

Fig. 7 • Body Diode Characteristics at  $T_C = 25^\circ\text{C}$

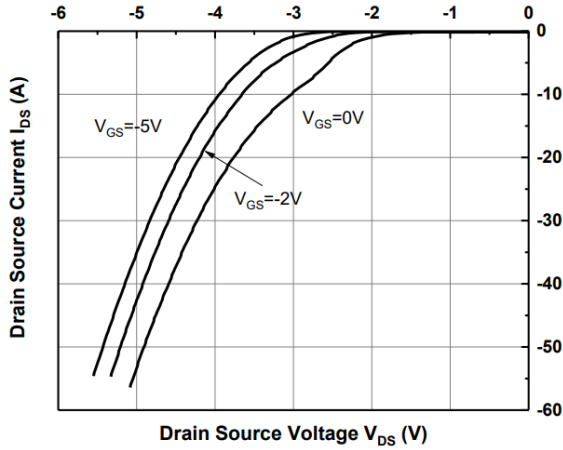


Fig. 7 • Body Diode Characteristics at  $T_C = 150^\circ\text{C}$

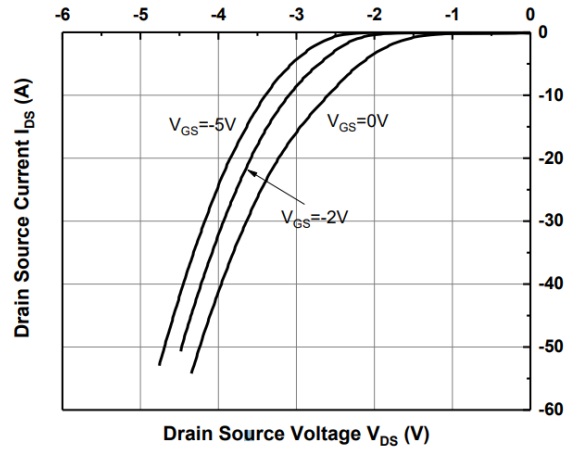


Fig. 9 • Output Capacitor Stored Energy

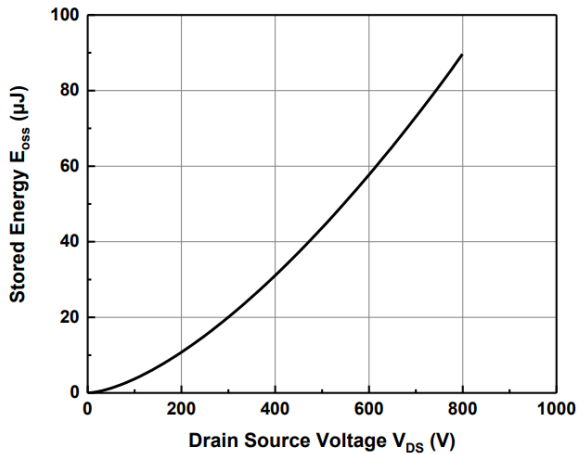


Fig. 10 • Maximum Power Dissipation  $P_D$  Derating vs. Case Temperature  $T_C$



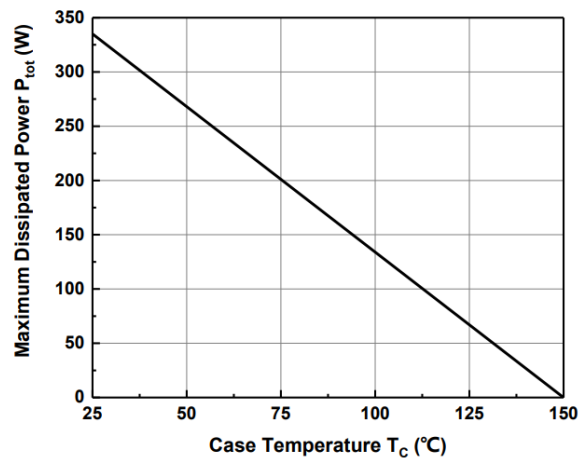


Fig. 11 • Safe Operating Area

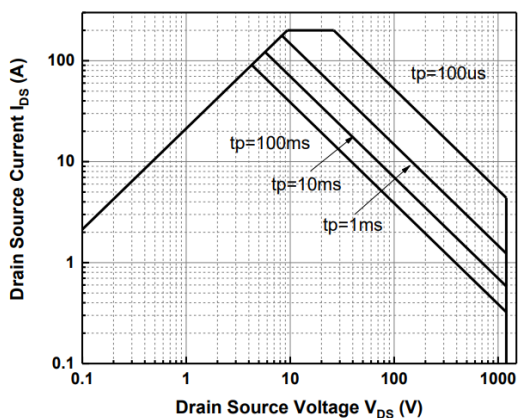

## PACKAGE OUTLINE

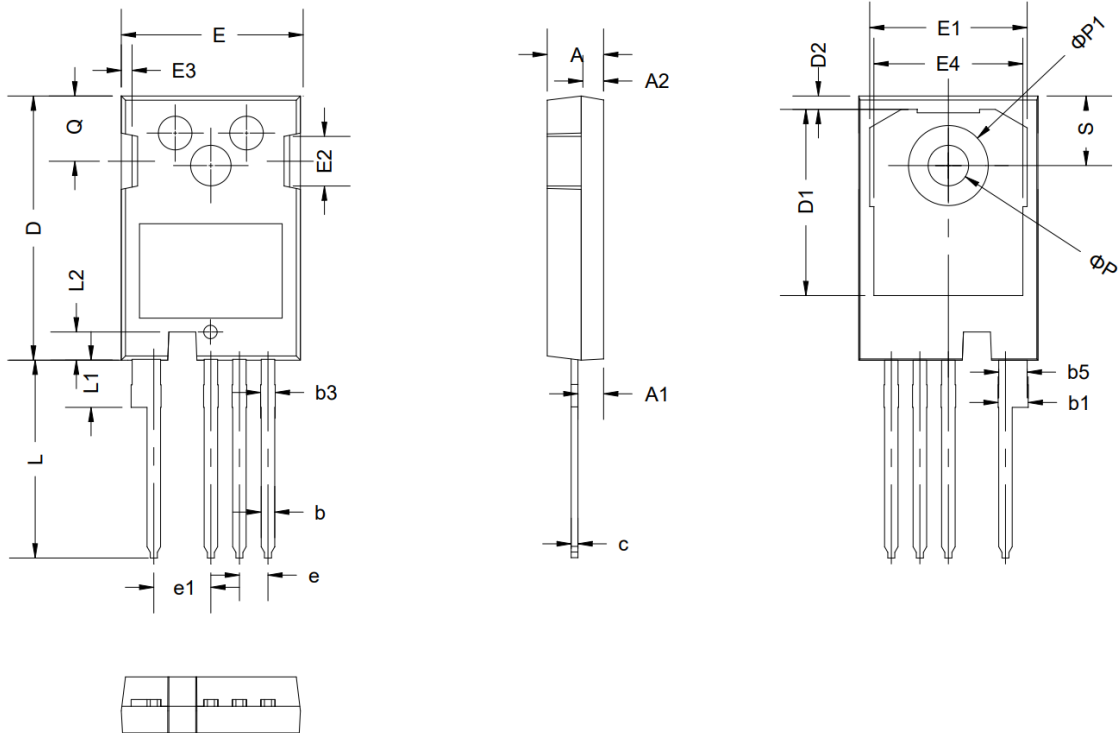



Sym	Millimeters (Min.)	Millimeters (Typ.)	Millimeters (Max.)
A	4.83	5.02	5.21
A1	2.29	2.41	2.54
A2	1.91	2.00	2.16
b	1.07	1.20	1.33
b1	2.39	2.67	2.84
b3	1.07	1.30	1.60
B5	2.39	2.53	2.69
c	0.55	0.60	0.68
D	23.30	23.45	23.60
D1	16.25	16.55	17.65
D2	0.95	1.19	1.25
E	15.75	15.94	16.13
E1	13.10	14.02	14.15

Sym	Millimeters (Min.)	Millimeters (Typ.)	Millimeters (Max.)
E2	3.68	4.40	5.10
E3	1.00	1.45	1.90
E4	12.38	13.26	13.43
e	2.54 BSC		
e1	5.08 BSC		
L	17.31	17.57	17.82
L1	3.97	4.19	4.37
L2	2.35	2.50	2.65
ØP	3.51	3.61	3.65
ØP1	7.19 REF		
Q	5.49	5.79	6.00
S	6.04	6.17	6.30

TO-247-4L package ▲ Epoxy meets UL94-V0

## ORDERING INFORMATION

Part Number	Package	Packing	Tube Qty.	Inner Box Qty.	Outer Box Qty.
B1M032120HK	TO-247-4L	Tube	30pcs	300pcs	1,800pcs

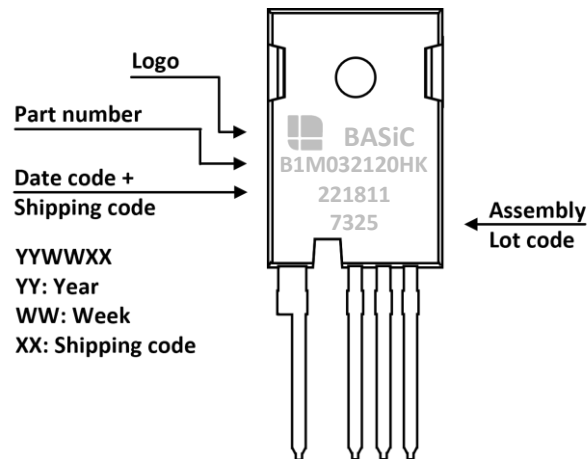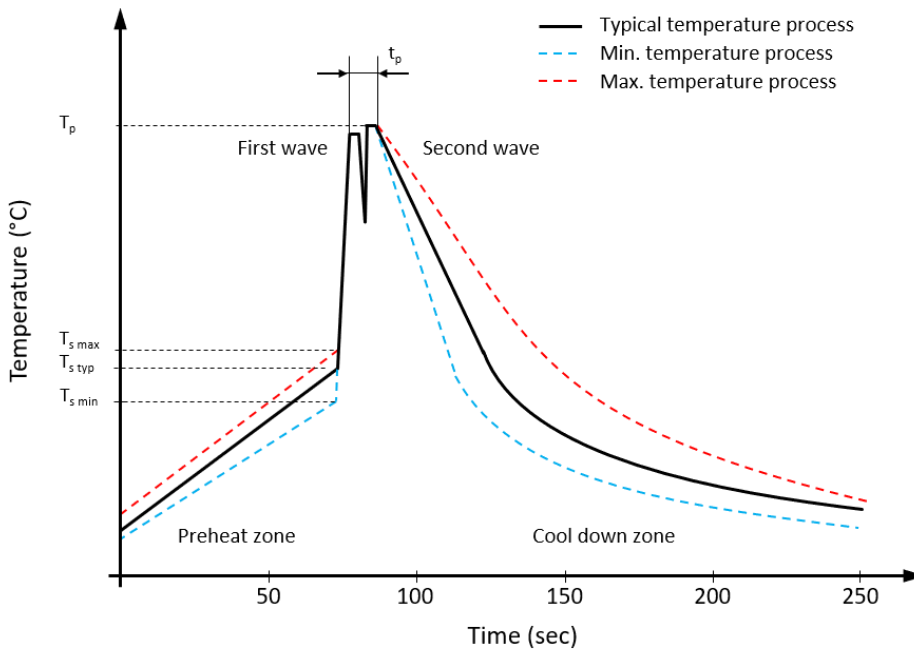**PART MARKING**

**RECOMMENDED WAVE SOLDERING PROFILE ▲ THT PACKAGE**

**Classification wave soldering profile ▲ Refer to EN 61760-1: 2006**

Profile Features		Value ▲ Sn-Pb Assembly	Value ▲ Pb-free Assembly
Preheat temperature min.	$T_{s\ min}$	100 °C	100 °C
Preheat temperature typical	$T_{s\ typ}$	120 °C	120 °C
Preheat temperature max.	$T_{s\ max}$	130 °C	130 °C
Preheat time $t_s$ from $T_{s\ min}$ to $T_{s\ max}$	$t_s$	70 seconds	70 seconds
Peak temperature	$T_p$	235 °C to 260 °C	245 °C to 260 °C
Time of actual peak temperature	$t_p$	Max. 10 seconds Max. 5 second each wave	Max. 10 seconds Max. 5 second each wave
Ramp-down date min.		~ 2 °C/second	~ 2 °C/second
Ramp-down rate typical		~ 3.5 °C/second	~ 3.5 °C/second
Ramp-down rate max.		~ 5 °C/second	~ 5 °C/second
Time 25°C to 25°C		4 minutes	4 minutes

## REVISION TABLE

Revision	Date	Status	Notes
001	30/09/2022	Initial release	Initial publication

## DISCLAIMER

Except for the written expressed warranties, MGT does not implicitly, by assumption or whatever else, warrant, under-take, promise any other warranty or guaranty for any MGT product.

All information and technical specifications made available by MGT are for guidance only and we reserve the right to change or modify them without prior notice. Unless expressly stated in writing by MGT, we reject any guarantees, obligations, or warranties.

All MGT products with the technical specifications described are suitable for use in certain applications. Operating, production, storage and environmental conditions can have a massive influence on the parameters mentioned in the data sheets, which cause the performance to vary over time.

It is subject to the user's duty of care to design and validate his products in such a way that appropriate measures are taken, such as protective circuits or redundant systems to ensure the safety standards required in the application.

MGT components are not designed or rated for use in life support, rescue, safety critical, military, or aerospace applications where failure or malfunction could result in property or environmental damage, serious injury or death. In the aforementioned cases, please contact us before using MGT products.

In principle, we reserve all rights and MGT's general terms and conditions apply. You can find them on our website [www.mgt.co.com](http://www.mgt.co.com).